

Black Polyimide Masking Tape

PPTB Series

RoHS & REACH Compliant

Black Polyimide Masking Tapes are made of 1 mil thick polyimide film with 1.5 mil thick silicone adhesive. This tape has excellent thermal resistance and electrical insulating properties. These black polyimide tapes are used for protection of components in wave soldering, anodizing, powder coating, and 3D printing.


Applications

- 3D Printing and Aerospace Assembly
- Automotive Facilities and Electronic Assembly
- Fiber Optics Manufacturing, Anodizing, and Solar Panels

Product Specifications ⁽¹⁾

Color	Black	
Adhesion Type	Silicone	
Film Thickness	1 Mil	ASTM D-3652
Adhesive Thickness	1.5 Mil	
Total Thickness	2.5 Mil	ASTM D-3652
Tensile Strength	30 lbs./in	ASTM D-3759
Elongation	>55 %	ASTM D-3759
Dielectric Strength	6,500 volts	ASTM D-149
Operating Temperature	-73°C (-100°F) to 260°C (500°F)	
Length	36 Yards	
Adhesion to Steel	25 Oz./in	ASTM D-3330
Core	3 in. Plastic Core	

⁽¹⁾ Specifications are subject to change at any time. If you have any questions, please contact us for the latest update.

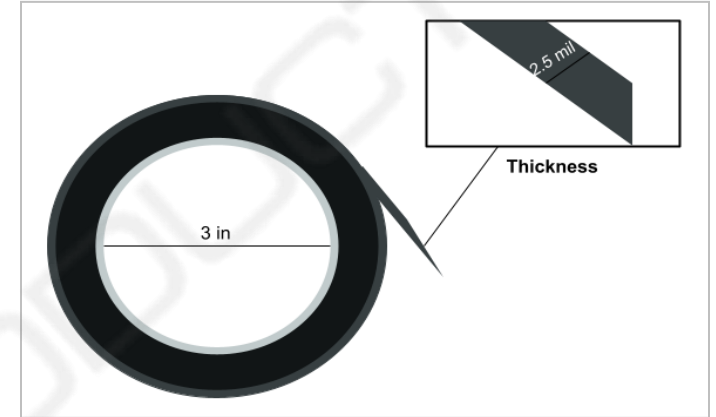

Bertech® makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its this product for any particular purpose, nor does Bertech® assume any liability whatsoever arising out of the application or use of this product. It is ultimately the responsibility of the customer to determine a product's suitability for a particular application.



MaskingProducts

640 Maple Ave

Torrance, CA 90503

Phone: (310) 787-0337

Email: sales@maskingproducts.net

www.maskingproducts.net

PRODUCT DATA SHEET