

# 5 Mil High Temperature Masking Tape

## PPT5 Series

### RoHS & REACH Compliant

High Temperature Masking Tapes are made of 5 mil thick polyimide film with 1.5 mil thick silicone adhesive. These tapes are reliable and durable with a unique combination of electrical, thermal, chemical, and mechanical properties that withstand extreme temperatures, vibration, and other demanding environments.


## Applications

- 3D Printing and Aerospace Assembly
- Automotive Facilities and Electronic Assembly
- Fiber Optics Manufacturing and Solar Panels

## Product Specifications <sup>(1)</sup>

Color	Amber	
Adhesion Type	Silicone	
Film Thickness	5 Mil	ASTM D-3652
Adhesive Thickness	1.5 Mil	
Total Thickness	6.5 Mil	ASTM D-3652
Tensile Strength	98 lbs./in	ASTM D-3759
Elongation	65 %	ASTM D-3759
Dielectric Strength	18,000 volts	ASTM D-149
Operating Temperature	-73°C (-100°F) to 260°C (500°F)	
Length	36 Yards	
Adhesion to Steel	25 oz./in	ASTM D-3330
Core	3 in. Plastic Core	

(1) Specifications are subject to change at any time. If you have any questions, please contact us for the latest update.

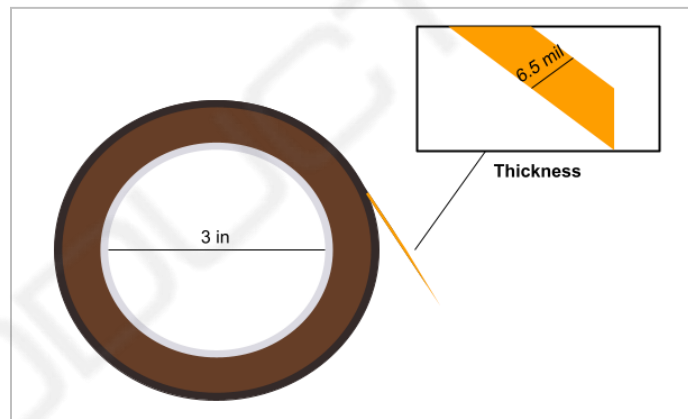

Bertech® makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its this product for any particular purpose, nor does Bertech® assume any liability whatsoever arising out of the application or use of this product. It is ultimately the responsibility of the customer to determine a product's suitability for a particular application.



### **MaskingProducts**

640 Maple Ave

Torrance, CA 90503

Phone: (310) 787-0337

Email: [sales@maskingproducts.net](mailto:sales@maskingproducts.net)

[www.maskingproducts.net](http://www.maskingproducts.net)

## PRODUCT DATA SHEET