

PTFE Glass Cloth Tape

PTFEGC36 Series

RoHS & REACH Compliant

PTFE Glass Cloth Tapes are constructed using 5 mil thick PTFE impregnated glass cloth with 2 mil thick silicone adhesive. They also have a yellow paper liner. They are used in many applications that require high temperature performance and high abrasion resistance. They can be removed cleanly without leaving any residue. These masking tapes are packaged on a 3" core and are 36 yards long.


Applications

- Packaging and Heat Sealing
- Ironing and Electrical
- Pressing Equipment

Product Specifications ⁽¹⁾

Color	Brown	
Adhesion Type	Silicone	
Film Thickness	5 Mil	ASTM D-3652
Adhesive Thickness	2 Mil	
Total Thickness	7 Mil	ASTM D-3652
Tensile Strength	180 lbs./in	ASTM D-3759
Elongation	5 %	ASTM D-3759
Dielectric Strength	3,000 volts	ASTM D-149
Operating Temperature	-73°C (-100°F) to 260°C (500°F)	
Length	36 Yards	
Adhesion to Steel	30 Oz./in	ASTM D-3330
Core	3 in. Plastic Core	

⁽¹⁾ Specifications are subject to change at any time. If you have any questions, please contact us for the latest update.

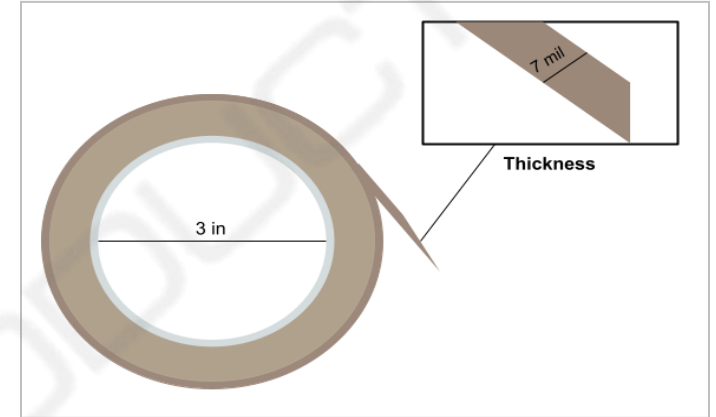

Bertech® makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its this product for any particular purpose, nor does Bertech® assume any liability whatsoever arising out of the application or use of this product. It is ultimately the responsibility of the customer to determine a product's suitability for a particular application.



MaskingProducts

640 Maple Ave

Torrance, CA 90503

Phone: (310) 787-0337

Email: sales@maskingproducts.net

PRODUCT DATA SHEET